
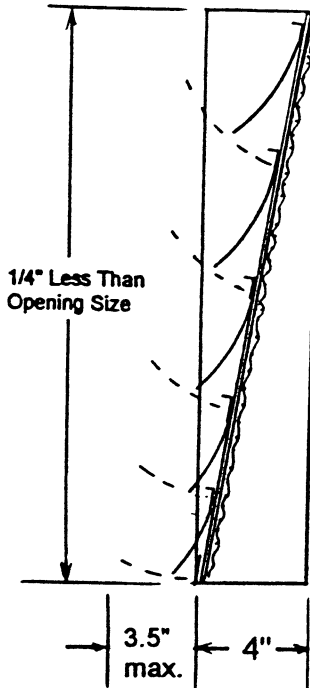


Model SPF Fabric Shutter

Vertical Mount

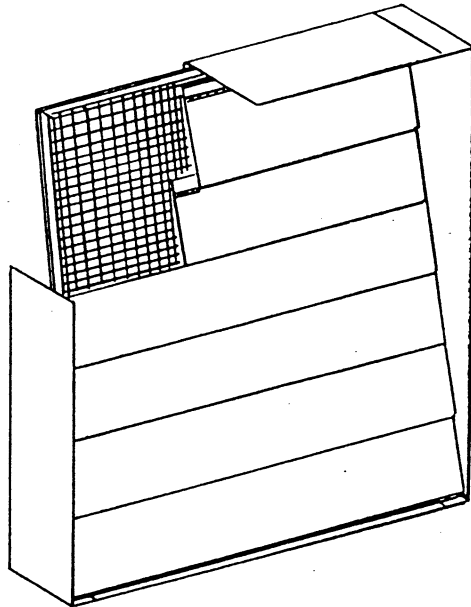

←
Airflow

UPSTREAM
FLANGE



DOWNSTREAM
FLANGE



Specifications:

Frame: External - 18 ga. Galvanized Steel
 Internal - 12 ga Extruded Aluminum
 Blade: Neoprene Coated Fiberglass
 Screen : 1/2" 19 ga. Galvanized Birdscreen
 Minimum Size: 6"w X 6"h
 Maximum Size: 36"w X 48"h
 Maximum Velocity: 1000 fpm

Optional Features:

Flange Upstream (1.5")
 Flange Downstream (1.5")
 Insect Screen
 Expanded Aluminum Screen
 Horizontal Mount (Airflow Up Only)

JOB _____

LOCATION _____ JOB NO. _____

ENGINEER _____ REPRESENTATIVE _____

CONTRACTOR _____ DATE _____

SPA-1-97

CREATIVE METALS

Division of Leader Industries Inc.

P.O. Box 40913
 2509 Cruzen Street

Nashville, TN 37204
 Nashville, TN 37211

Phone: 615-256-3500
 Fax: 800-388-3806