



## Model PFV Pneumatic Fusible Valve

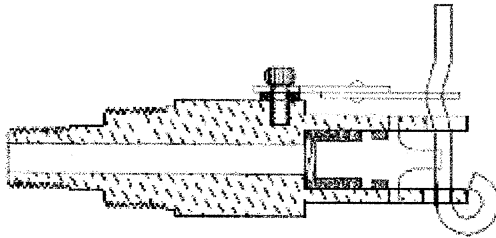

Part#	Temperature Rating	
	°F	°C
325135	135°	57°
325155	155°	68°
325165	165°	74°
325212	212°	100°
325280	280°	138°

A7246

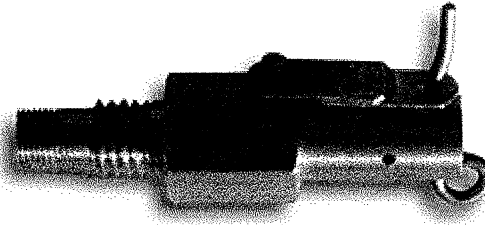

ISO 9001

- Specifically Designed for Pneumatic Actuated Fire/Smoke Dampers
- Listed by Underwriters Laboratories, Inc.
  
- Corrosion Resistant Construction
- All Brass Components
- Rigid Assembly
  
- Comes to You Ready to Install
- 1/2-13 UNC Threads are Furnished for Ease of Mounting in Damper Walls
- Utilizes our Model-J Fusible Link as Thermal Actuating Device
- 1/8 NPT Male Pipe Threads are Furnished for Ease of Connection to Air Lines