
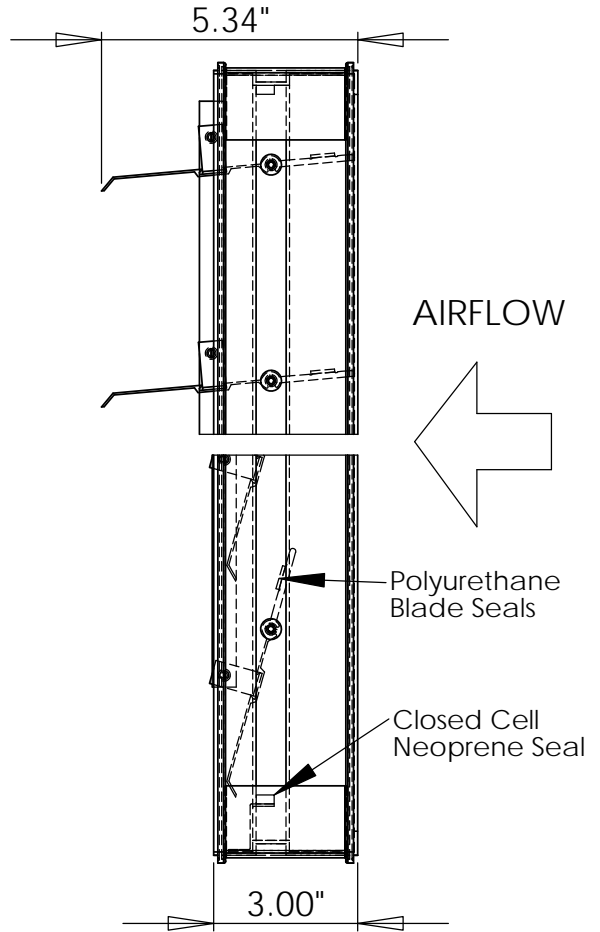


Model: BDA-V Backdraft Damper

Vertical Mount, Horizontal Airflow

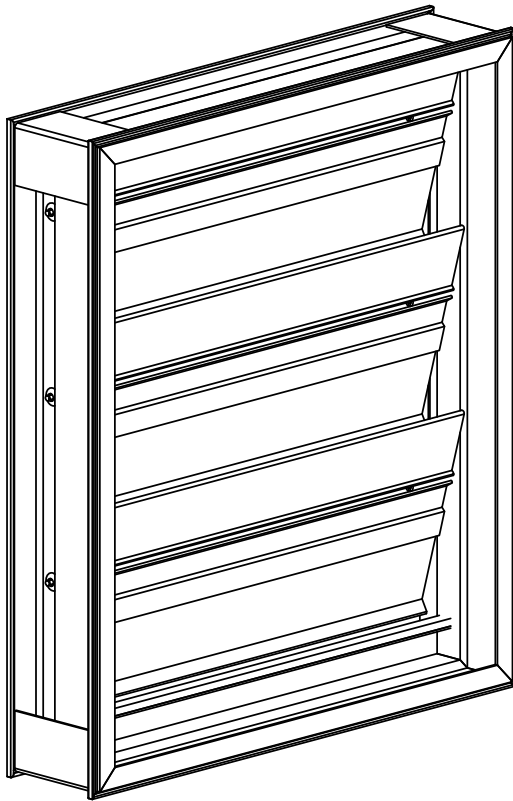

Standard Specifications:

Frame: .070" Extruded Aluminum

6063-T5 Alloy, Mitered Corners

Blade: .050" Extruded Aluminum 6063-T5

Alloy with Polyurethane Seals

Bearings: .25" ID Nylon

Axles: .25" Nylon


Minimum Size: 6" w x 6" h

Maximum Size: 36" w x 48" h

Optional Features:

- Flange Upstream (1.5")
- Flange Downstream (1.5")
- Counter-Balanced
- Birdscreen
- Insect Screen
- Electric Operator

Options

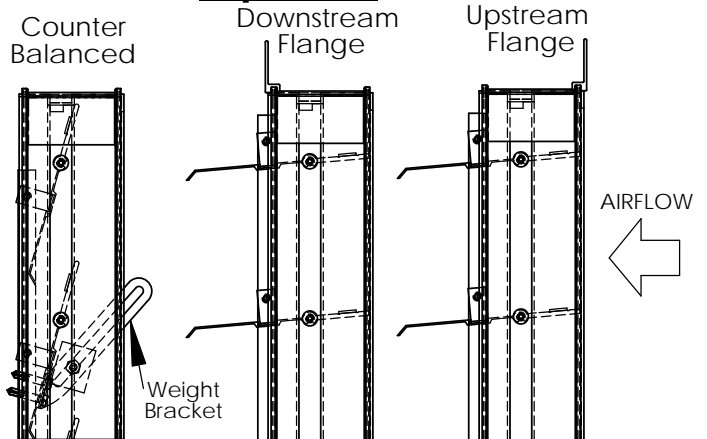

Note: All BDA dampers are built 1/4" under size in both directions unless ordered actual size

JOB: _____
 LOCATION: _____ JOB NO: _____
 ENGINEER: _____ REPRESENTATIVE: _____
 CONTRACTOR: _____ DATE: _____



P.O. Box 40913
 Nashville, TN 37204
 www.leaderindustries.com
 A Division of Leader Industries, Inc.