


LEADER


Dampers & Louvers

Dade County Approved Hurricane Louvers Model DC-436


DC-436-4

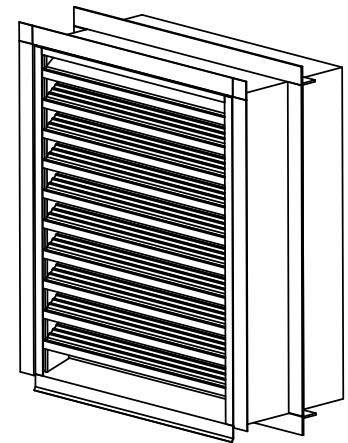


DC-436-2

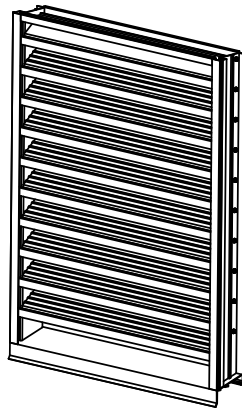

DC-436-3

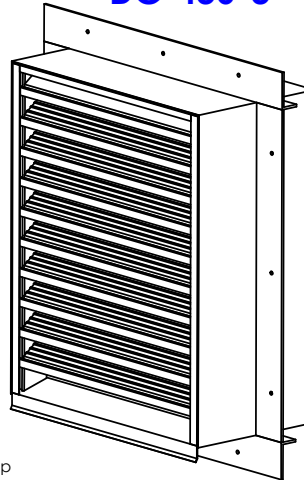

DC-436-1

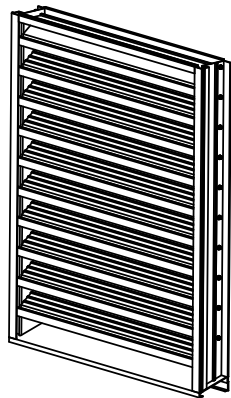

Caulking Groove
Trubolt Wedge Anchors 3/8" x 2.5" or Tapcon (LTD) 3/8" x 2.75" one per clip

Aluminum Angle Clips 18" O.C. 2" x 2" x 3/16" x 2" Long with 2 #12-14 x .88 Tek Screws

Continuous 2" x 2" x 3/16" Angle Aluminum
Ease of Installation! DC-436-4 can be mounted without the use of mechanical fasteners to the substructure!

Trubolt Wedge Anchors 3/8" x 2.5" or Tapcon (LTD) 3/8" x 2.75" one per clip

Continuous 4" x 2" x 3/16" Angle Aluminum

Flanged Sleeve 10 Ga. Aluminum Fully Welded Corners

Caulk around Perimeter
Trubolt Wedge Anchors 3/8" x 2.5" or Tapcon (LTD) 3/8" x 2.75" one per clip

Aluminum Angle Clips 18" O.C. 2" x 2" x 3/16" x 2" Long with 2 #12-14 x .88 Tek Screws

Flanged Sleeve 10 Ga. Aluminum Fully Welded Corners

Notice of Acceptance Number 007-1105.04

LEADER
Dampers & Louvers

P.O. Box 40913
Nashville, TN 37204
www.leaderindustries.com
A Division of Leader Industries, Inc.

