


Model BV Extruded Aluminum Louver Brick Vents Stationary Blade

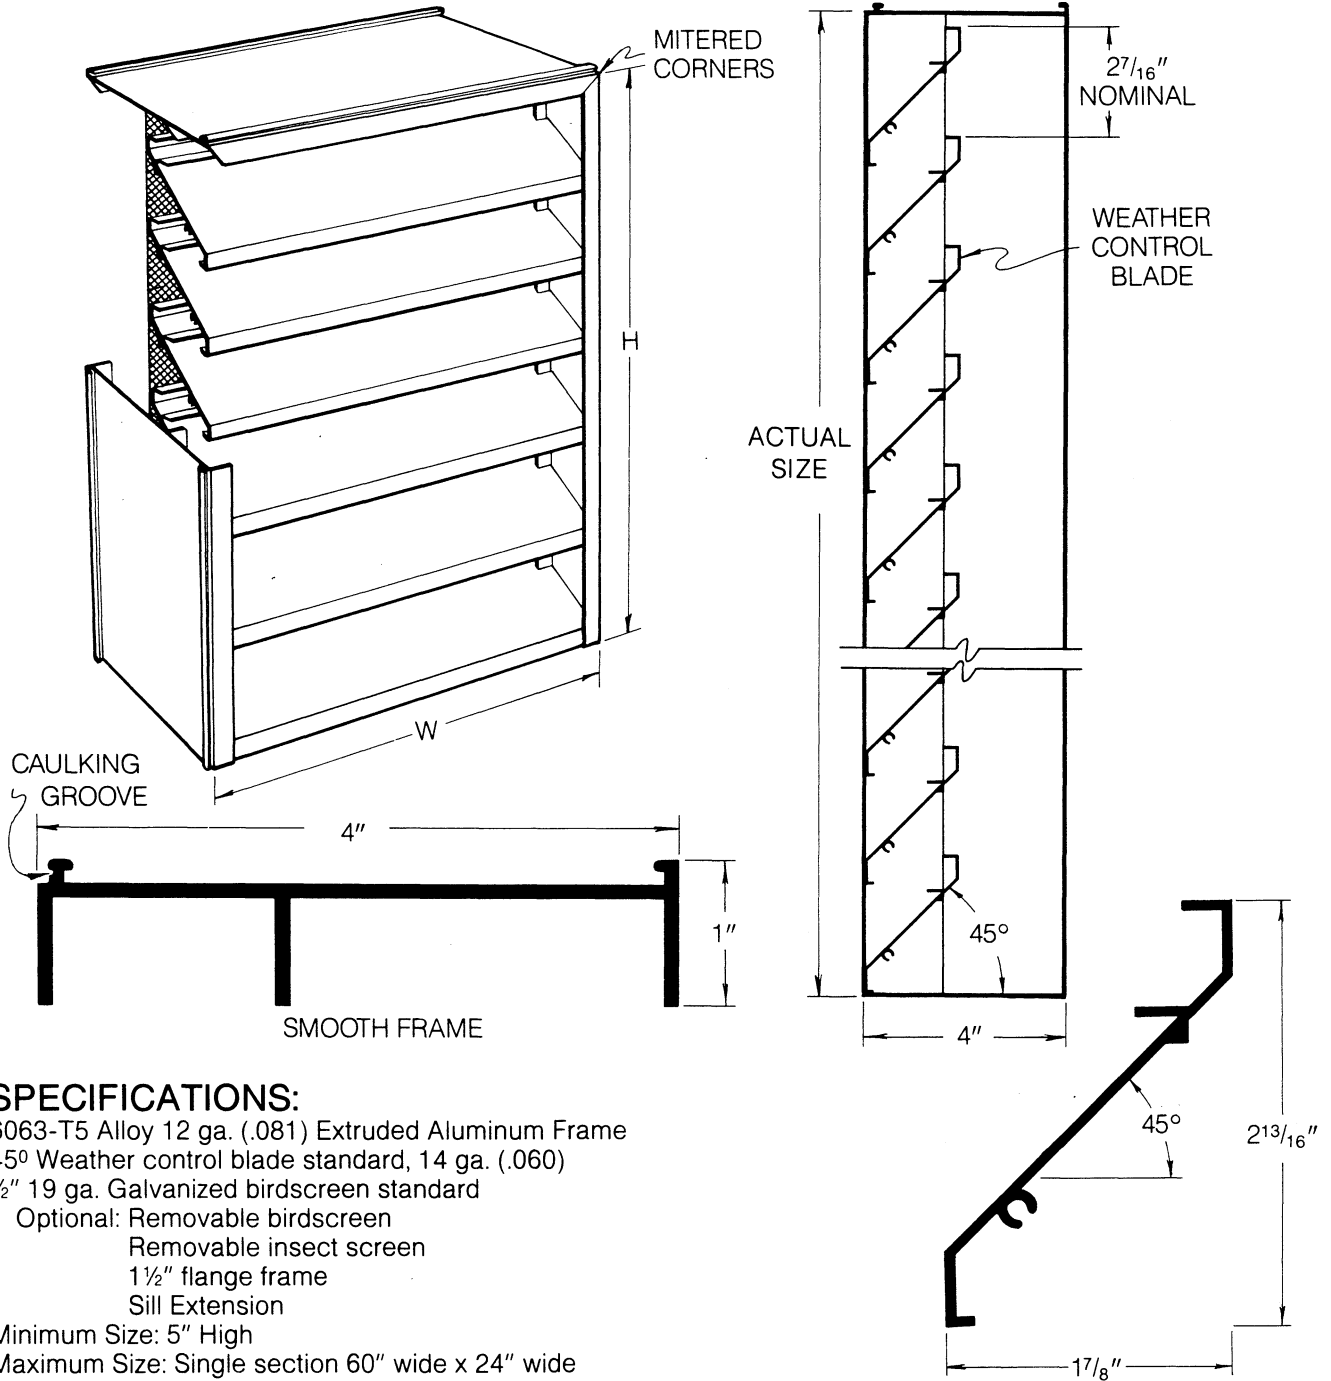

SPECIFICATIONS:

- 6063-T5 Alloy 12 ga. (.081) Extruded Aluminum Frame
- 45° Weather control blade standard, 14 ga. (.060)
- 1/2" 19 ga. Galvanized birdscreen standard
- Optional: Removable birdscreen
- Removable insect screen
- 1 1/2" flange frame
- Sill Extension
- Minimum Size: 5" High
- Maximum Size: Single section 60" wide x 24" wide

JOB _____

LOCATION _____ JOB NO. _____

ENGINEER _____ REPRESENTATIVE _____

CONTRACTOR _____ DATE _____

APPROVAL _____



A Division of Leader Industries, Inc.


P.O. Box 40913
Nashville, TN 37204
www.leaderindustries.com



Model **BV** Extruded Aluminum Louver Brick Vents Stationary Blade

FREE AREA PERFORMANCE DATA

		WIDTH									
		6	12	18	24	30	36	42	48	54	60
HEIGHT	6	.045	.091	.137	.183	.228	.274	.320	.365	.411	.456
	12	.183	.365	.548	.730	.912	1.09	1.28	1.46	1.64	1.83
	18	.274	.548	.821	1.10	1.37	1.64	1.92	2.19	2.47	2.74
	24	.456	.912	1.37	1.82	2.28	2.74	3.19	3.65	4.11	4.56

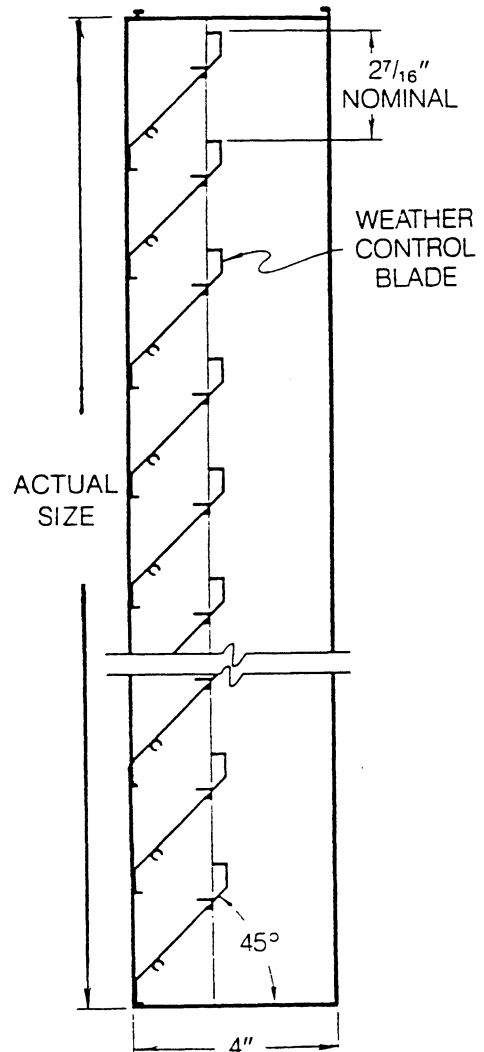

SPECIFICATIONS:

6063-T5 Alloy 12 ga. (.081) Extruded Aluminum Frame

45° Weather control blade standard, 14 ga. (.060)

½" 19 ga. Galvanized birdscreen standard

- Optional: Removable birdscreen
- Removable insect screen
- 1½" flange frame
- Sill Extension

Minimum Size: 5" High

Maximum Size: Single section 60" wide x 24" wide

LEADER

A Division of Leader Industries, Inc.

P.O. Box 40913
Nashville, TN 37204
www.leaderindustries.com